



THINFILM

Partners of Greece

ROOF SYSTEMS

INCREASED RETURN ON INVESTMENT

3% TO 10% MORE ENERGY PRODUCTION


3
kW

5
kW

10
kW

20
kW

- » DESIGN FLEXIBILITY WITH NO STRING CALCULATIONS
- » OPTIMIZED USE OF AVAILABLE SPACE
- » DECREASED ASSEMBLY TIME
- » AVOID LOSSES DUE TO SHADING
- » SAFETY IN LOW VOLTAGE

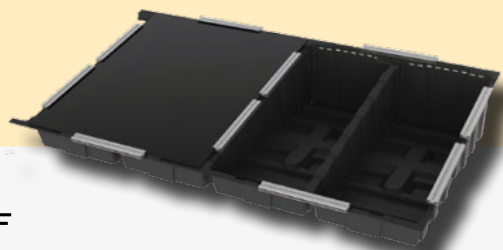

FLAT ROOF

„E-pan“ Solution

Material: Polycarbonate (PC)

Temperature: -100°C to +125°C

Suitable for: All types and sizes of panels (c-Si & a/ μ -Si)


Inclination: 10-25 degrees

Mounting: Ballast or Roof penetration

Recycling: 100%

Guarantee: 20 Years

Assembly time: 2-5 minutes per panel

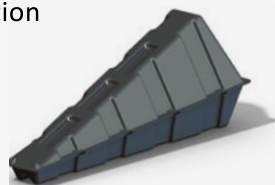

CORRUGATED ROOF

High quality railing technology

Minimum weight per m²

Fastest installation time

Suitable for c-Si & a/ μ -Si panels

Lowest mechanical stress for panels

Proven Swiss Technology Engineering

paralex



 Mainpower Hellas Ltd
Argyrokastrou 21
152 34 Halandri, Greece

Tel: 210 6007910
Fax: 210 6007976
Email: info@mainpower.eu

www.thinfilm.gr